






### Absorbs shocks | Prevent vibrations

## Safe | Strong | Flexible

- Resists welding splatters & grinding sparks
- RMA Class A oil resistant
- 360° ball swivel reduces twisting and kinking of hose
- Male/Female Connections
- Extreme weather flexibility
- Lightweight, coils easily
- No memory lays flat
- Abrasion resistant
- Kink resistant core design
- 300 PSI working pressure
- 4:1 Safety factor

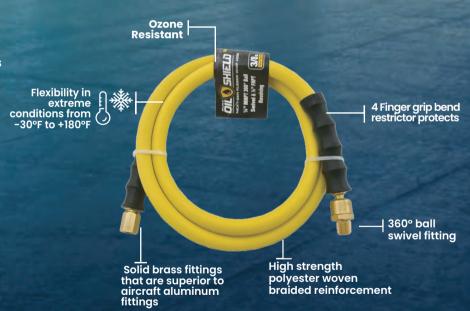

Available Hose I.D. (in.): 3/8

Available Hose Length (ft.): 5







# 90 Days Workmanship Warranty

### Perfect hose for your shop





## **Snubber Air Hose**

### **RMA Class A oil resistant**

#### **Features**

- Resists welding splatters & grinding sparks
- Solid Brass fittings that are superior to aircraft aluminum fittings.
- 360°Bball swivel reduces twisting and kinking of hose
- 100% Rubber construction
- 30% Lighter than standard rubber air hoses in same class
- High strength polyester woven braided reinforcement
- 300 PSI working pressure | 4:1 Safety factor
- Maintains integrity under extreme weather conditions
- Flexibility from -30°F to +180°F
- Ozone resistant | Abrasion resistant | Kink Resistant
- 4 Finger grip bend restrictor protects the ends of the fittings and provides better use and control over the hose.

The OilShield Snubber hose is the perfect accessory for your shop. It helps keep the supply hose on the ground and helps prevent a tripping hazard in the shop. The OilShield Snubber hose is made from the same award-winning OilShield hose. It also carries the Class A Oil resistance rating. Put one of the OilShield snubber hoses on each tool and make changing out tools quicker and easier as well as keeping your shop safer.



Flexibility in extreme conditions from -30°F to +190°F

300 PSI Working Pressure

1200 PSI Burst Pressure

Safety Factor

Model#	SKU#	Description	I.D	Length	Fitting
OSSR3805	10011140	OilShield Snubber Air Hose 3/8" x 5' w/ 360° Ball Swivel	3/8"	5′	1/4" FNPT + 1/4" M-Ball Swivel Fitting



